



## Custom Dynamics® LED Boltz Installation Instructions

We thank you for purchasing the Custom Dynamics® LED Boltz. Our products utilize the latest technology and high quality components to ensure you the most reliable service. We offer one of the best warranty programs in the industry and we back our products with excellent customer support, if you have questions before or during installation of this product please call Custom Dynamics® at 1(800) 382-1388.

**Part Numbers:** CD-BOLT-R-B  
CD-BOLT-R-P

**Package Contents:**

- LED Boltz (pair)

**Fits:** Universal; 12VDC Systems with a negative ground.



### ATTENTION

Please read all Information below before Installation

**Warning:** Disconnect negative battery cable from battery; refer to owner's manual. Failure to do so may result in electrical shock, injury, or fire. Secure negative battery cable away from positive side of battery and all other positive voltage sources on vehicle.


**Safety First:** Always wear appropriate safety gear including safety glasses when performing any electrical work. It is highly recommended that safety glasses be worn throughout this installation process. Be sure vehicle is on level surface, secure and cool.

**Important:** This product is designed and intended for use as auxiliary lighting only. It is NOT intended to replace any original equipment lighting installed on the vehicle and should not be used for that purpose. This product must be wired so that it does not interfere with any original equipment lighting.

### Installation:

1. Select desired location to install the LED Boltz. Cover the area with masking tape to protect the finish. Mark the desired locations for installation. Recommend a minimum spacing of 1" between LED Boltz.
2. Drill a 1/2" mounting hole at each mounting location.
3. Remove the 2 Locking Nuts from the Led Boltz. Do not remove the O-Ring gasket.
4. Feed the wire and the LED Boltz through the mounting hole.
5. Secure the LED Boltz with the 2 Locking Nuts.
6. Route LED Boltz wiring to the point of termination, Make sure wiring does not come in contact with any moving or high heat parts. Ensure wiring cannot be pinched, cut or frayed.
7. Connect to vehicle lighting circuits for desired operation, see Wiring Diagram below for wiring connections.
8. Test all lighting for proper operation.

### Wiring Diagram

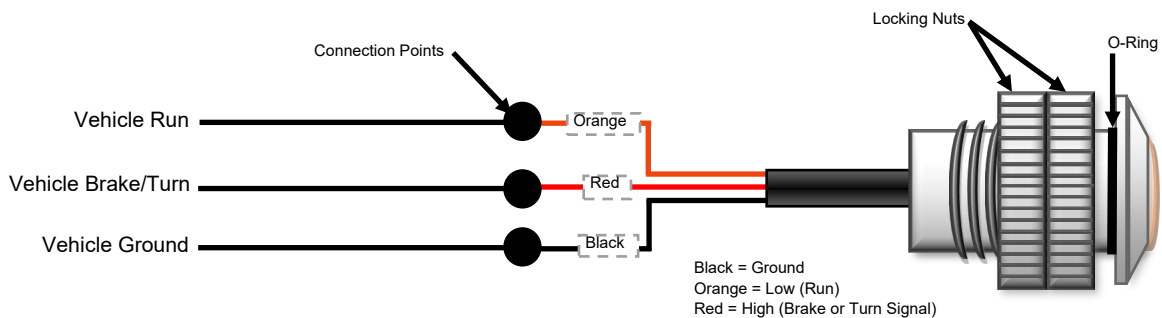

Questions? Call us at: 1 (800) 382-1388 M-TH 8:30AM-5:30PM / FR 9:30AM-5:30PM EST