


Yamaha Stryker DRL Install Instructions


- 1) Remove headlight by taking out the two headlight ring holding screws. (see photo #1)
- 2) Remove metal deflector bracket from bottom side of lower triple tree. (see photo #2)
- 3) Mount DRL bar on the bottom side of deflector and reinstall on to lower triple tree, and reinstall DRL and deflector onto lower triple tree. (see photos #4 & #5 and #6)
- 4) Run wire from DRL along wire running from turn signal into head light shell. Using zip ties to hold in place. (see photo#7)
- 5) Using either the left set or right set of wires going to the turn signals use the supplied Posi-Tap connectors to tap into the wires as follows. (see photo #8 & #9)
- 6) Turn on ignition to test operation
- 7) Reinstall headlight.
- 8) Finished product should look like this. (see photo #10)




Picture #1

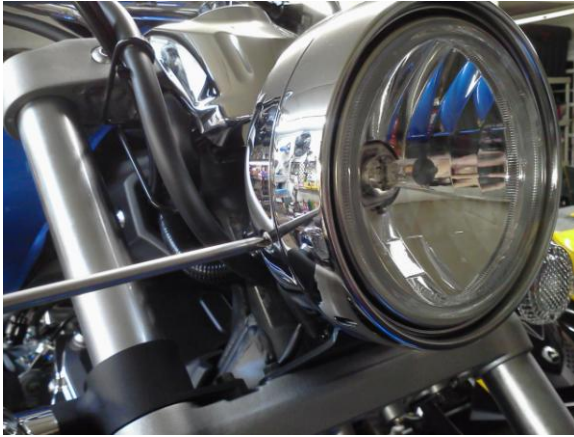

Picture #2

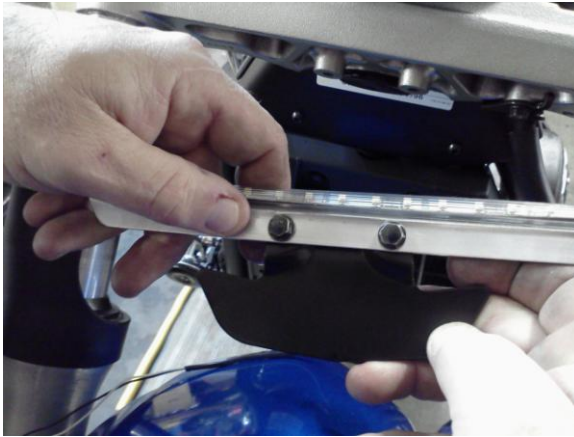

Picture #4

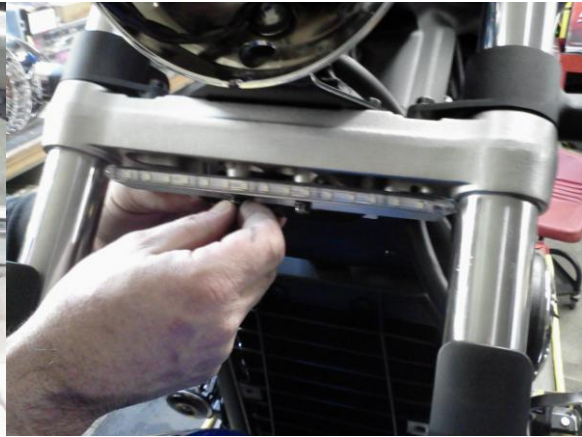

Picture #5



Picture #6




Picture #7



Picture #8



Picture #9

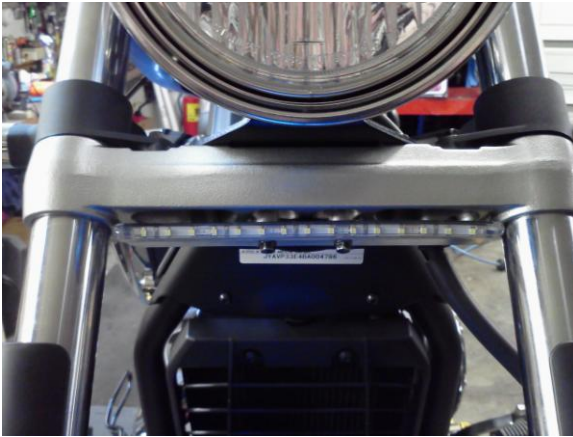

Picture #10

