



UNIVERSAL MIRROR MOUNT 1458

UNIVERSAL FITMENT FOR:
SPORT BIKES WITH MIRROR BOLT SPACING FROM 1" TO 1 5/8" APART

HONDA: ALL '00-UP CBR 600, '00-'01 CBR 929, '02-'03 CBR 954, '04-UP CBR 1000, '00-'03 CBR 1100XX, '00-UP RC51, '00-UP VFR 800 INTERCEPTOR

KAWASAKI: ALL '00-UP ZX6R, '04-UP ZX10R, '06-UP ZX14R

SUZUKI: ALL '99-UP HAYABUSA, '00-UP GSXR 600, '00-UP GSXR 750, '01-UP GSXR 1000

YAMAHA: ALL '00-UP YZF R-6/600R, '00-UP YZF R-1/1000R, '01-UP FZ-1/1000

PARTS INCLUDED

- 2 Universal Mirror Mounts
- 1 Hardware Kit, Including:
 - 2 M6 x 1mm x 20mm Button Head Cap Screws
 - 2 M6 x 1mm x 25mm Button Head Cap Screws
 - 2 M6 x 1mm x 30mm Socket Head Cap Screws
 - 2 M6 x 1mm x 35mm Socket Head Cap Screws
 - 4 Hex Flange Nuts
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

TOOLS SUGGESTED

Set of hex wrenches and combination wrenches.

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

PROCEDURE

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

-cont.-

CUSTOMER SERVICE
877.370.3604 (toll free)

INSTALLATION QUESTIONS
techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - The product must be properly installed, maintained and operated under normal conditions.
 - Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG


You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn® product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.



- STEP 2** Remove Stock Mirrors with stock mounts.
- STEP 3** Test fit the new universal mirror mount to check for proper fitment and seal against the fairing.
- STEP 4** Take out the 1/4-20 x 1.25 socket head cap screw located on the back of the mirror mount. See [PIC. 1](#).
- STEP 5** Remove the mirror pivot to expose the second mounting location. See [PIC. 1](#).
- STEP 6** Mount the adapter plate to the fairing and secure it with the provided hardware needed for your application.
- NOTE:** **SOME BIKES WILL NOT NEED TO USE THE PROVIDED HEX FLANGE NUTS BECAUSE OF STOCK MOUNTS BEING TAPPED.**
- STEP 7** Secure the desired mirror and stem to the mirror pivot. Secure it in the most desired viewing position.
- STEP 8** Reinstall the mirror pivot with the mirror and stem attached. Start the 1/4-20 x 1.25 socket head cap screw that was removed in step 4.
- STEP 9** Sit on the bike and adjust pivot for best viewing position. Once satisfied, tighten the 1/4-20 x 1.25 socket head cap screw to secure mirror pivot.
- STEP 10** Repeat application for opposite side.

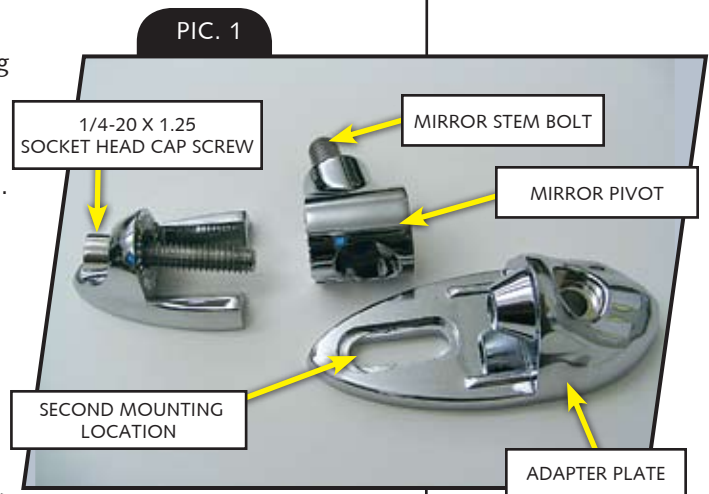

ATTENTION! It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not warranty components lost due to improper installation. Periodic maintenance may be required.

Ride On!