

Custom Dynamics® ProBEAM® Scout Front Turn Signals Installation instructions



We thank you for purchasing the Custom Dynamics® ProBEAM® Scout Front Turn Signals. Our LEDs offer maintenance free service and higher visibility. Our ProBEAM® product line utilizes the latest technology and automotive grade components to ensure the highest level of reliable service. Custom Dynamics® offers one of the best warranty programs and customer support in the industry. If you have any questions during the installation of this product please call us at 1 (800) 382-1388.

Part Number: PB-SCOUT-AW-BS PB-SCOUT-AW-CS
US Patents: D830,597 D830,595
Chinese Patents ZL201830045649.4, ZL201830045624.4

Package Contents:

- ProBEAM® Scout Front Turn Signals (2)
- Instructions (1)

Fitment: 2015-2024 Indian Scout, 2016-2024 Scout Sixty, 2018-2024 Scout Bobber, 2020-2024 Scout Bobber Sixty, 2020-2024 Scout Bobber Twenty, 2022-2024 Scout Rogue, and 2022-2024 Scout Rogue Sixty.


Note: Replaces front turn signal OEM part 2412602.

Note: Custom Dynamics® ProBEAM® Scout Turn Signals can **ONLY** be used with ProBEAM® Bullet Style Turn Signal Lenses. Bullet Bezel Turn Signal Adapters are not compatible with ProBEAM® Scout Turn Signals.



Installation:

1. Remove motorcycle seat and disconnect the negative battery cable from the battery. Consult your owners manual if unsure of this process.
2. Remove the headlight and nacelle to expose the turn signal wiring and connections. Consult your owners manual if unsure of this process.
3. Locate the Left and Right Front Turn signal connectors in the headlight bucket and disconnect them. Shown in **Figure 1**.

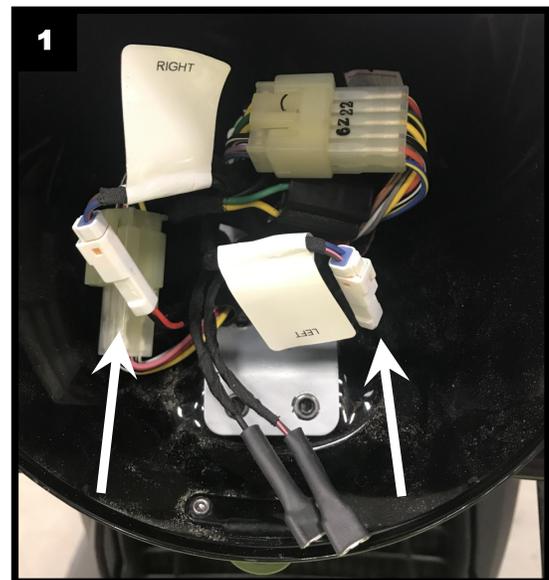

Please read all Information below before Installation

Warning: Disconnect negative battery cable from battery; refer to owner's manual. Failure to do so may result in electrical shock, injury, or fire. Secure negative battery cable away from positive side of battery and all other positive voltage sources on motorcycle.

Safety First: Always wear appropriate safety gear including safety glasses when performing any electrical work. It is highly recommended that safety glasses be worn throughout this installation process. Be sure motorcycle is on level surface, secure and cool.

Questions? Email: info@CustomDynamics.com or Call us at: 1 (800) 382-1388 M-TH 8:30AM-5:30PM / FR 9:30AM-5:30PM EST

Installation Instructions - Page 2

Installation Continued:

4. Remove both front turn signals by removing the mounting bolt from both front turn signal mounts. Remove both turn signal mounts from the fork legs along with the wiring harnesses from the headlamp bucket. Shown in **Figure 2**.



5. Remove the existing Turn Signal Housings from the mounts by removing the bolt on the inside mounts. Shown in **Figure 3**.




6. Install the new ProBEAM® Turn Signal housings using the existing OEM mounting bolts to the turn signal mounts. Be sure to use a thread locking agent to prevent the mounting bolts from loosening.
7. Reinstall both turn signal mounts to the fork leg using the existing OEM bolts and hardware.

8. Route the new Turn Signal wires through the hole on each side of the Headlight bucket.
9. Connect the 2-pin connector from each turn signal housing to its associated left or right connector in the headlight bucket.
10. Now connect the Left and Right turn signal ground wires. Locate the Position Light Ground wire inside the headlight bucket (Black Wire). Shown in **Figure 4**.



11. Connect the spade connectors from each turn signal in line to the Position Light Ground spade connector. Shown in **Figure 5**.

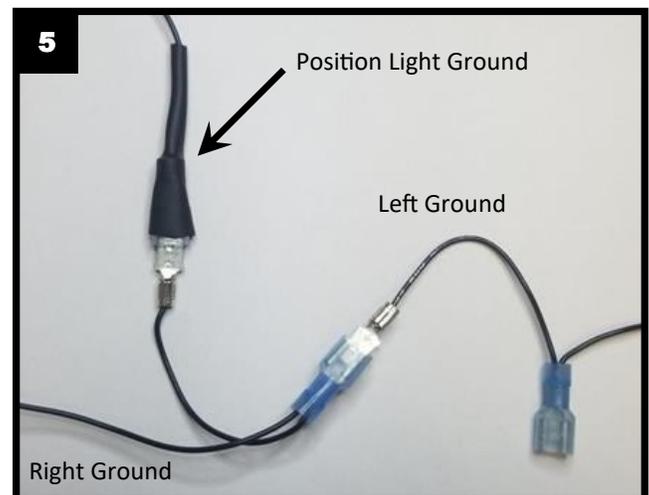

12. Test the operation for Run and Turn functions of both front turn signals.
13. Reinstall the headlight.
14. Reconnect the negative battery cable to the battery and install the seat.
15. Test all lighting for proper operations before riding.