



Custom Dynamics® Low Rider ST Taillight Adapter Installation Instructions

We thank you for purchasing the Custom Dynamics® Low Rider ST Taillight Adapter. Our products utilize the latest technology and highest quality components to ensure you the most reliable service. We offer one of the best warranty programs in the industry and we back our products with excellent customer support, if you have questions before or during installation of this product please call Custom Dynamics® at 1(800) 382-1388.


Part Number: TL-LRST-ADPT

Package Contents:

- Low Rider ST Taillight Adapter (1)
- Instructions (1)

Fits: 2022-2024 Harley-Davidson® Softail Low Rider ST (FXLRST) and 2022 Low Rider El Diablo (FXRST).

Note: Compatible with Custom Dynamics® LED Taillights (sold separately).

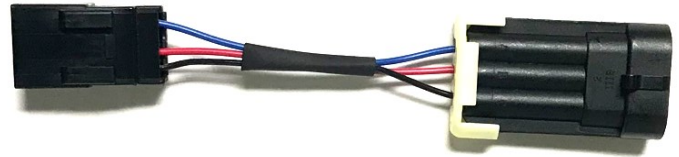

Installation:

1. Disconnect the negative battery cable from the battery.
2. Remove the OEM taillight from the motorcycle by removing the two screws, save for reuse.
3. Connect the Custom Dynamics® Low Rider ST Taillight Adapter to the motorcycles taillight harness and to the new Custom Dynamics® LED Taillight (sold separately). Shown in **Figure 1**.




ATTENTION



Please read all Information below before Installation

Warning: Disconnect the negative battery cable from battery; refer to owner's manual. Failure to do so may result in electrical shock, injury or fire. Secure negative battery cable away from positive side of battery and all other positive voltage sources on the motorcycle.

Safety First: Always follow the basic safety guidelines while working. Park the motorcycle on a flat level surface and make sure ignition is off.

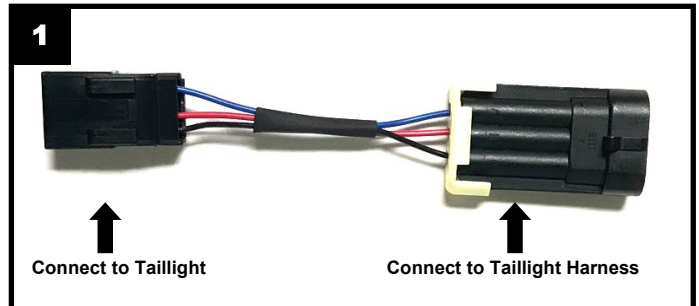

4. Install new Custom Dynamics® LED Taillight (sold separately), reusing the two OEM screws. Refer to Custom Dynamics® LED Taillight installation instructions.
5. Reconnect the negative battery cable to the battery.
6. Test rear taillight for proper operation.