



Custom Dynamics® Stingerz® Ultimate Grille Kit Installation Instructions

We thank you for purchasing the Custom Dynamics® Stingerz® Ultimate Grille Kit! Our products utilize the latest technology and high quality components to ensure you the most reliable service. We offer one of the best warranty programs in the industry and we back our products with excellent customer support, if you have questions before or during installation of this product please call Custom Dynamics® at 1(800) 382-1388.

<p>Part Number: STGRILLE1</p> <hr/> <p><u>Package Contents:</u></p> <ul style="list-style-type: none"> - Stingerz99 LED Strips (2) - Heat Shrink Terminals (2) - 9" Black Tie Wraps (10) - Adhesive Primer (2) - 3M Tape (1') - 22 Gauge Conductor Cable (30') - Adhesive Lined Shrink Tubing (1) - Cage Clamp 3 Position (2) - Isopropyl Alcohol Wipe (2) <hr/> <p>Fits: Compatible with 12VDC systems with a negative ground.</p>	<p><u>Tools Needed:</u></p> <ul style="list-style-type: none"> - Screwdriver (Flat & Philips) - Wire Cutter/Strippers - Wire Crimpers - Heat gun or blow dryer - Open end wrenches - Razor blade cutting tool <hr/> <p><u>Important:</u> Disconnect negative battery cable from battery; refer to owner's manual. Failure do to so may result in electrical shock, injury, or fire. Secure negative battery cable away from positive side of battery and all other positive voltage sources on bike.</p> <p><u>Note:</u> This kit is designed to be used with one of our Street Magic Remote Controls, if a remote control is not used a rocker switch and fuse can be substituted for the remote.</p> <p><u>Caution:</u> Always wear appropriate safety gear including safety glasses when soldering or performing any electrical work. It is highly recommended that safety glasses be worn throughout this installation process.</p> <p><u>Caution:</u> Be sure vehicle is on level surface and secure and cool.</p>
---	--

Installation:

1. Select hidden locations to mount LED Accent Lights to provide best coverage. Typically top and bottom sections of grille.
2. Clean mounting locations on vehicle with alcohol pads, apply adhesive primer and allow to dry.
3. Carefully remove backing from double sided tape and place light on selected mounting location. Press firmly and hold for 10 seconds. Repeat for all lights to be mounted on vehicle.
4. Connect light bar #1 to light bar #2 using shrink tubing. To use shrink tubing, strip ends of wires. Cut and slide small piece of shrink tubing over one end of wire. Twist wires together. It is not necessary to solder them. Slide shrink tubing over wires. Heat with heat gun or hair dryer. This heat shrink tubing has a special glue that will melt and form a water-proof seal.
5. Cut and cap excess wires on far end of Light Bar #2 using supplied heat shrink tubing. Slide one piece of tubing over black and one over red, heat with heat gun and pinch end closed.
6. Extend wires off end of Light Bar #1 using heat shrink tubing such that they extend back to battery compartment of vehicle. Route wires such that they not interfere with normal operation of vehicle.
7. Select several locations to secure all wires to vehicle. Secure wires using tie wraps provided.
8. Connect Black wire to one cage clamp connector. Connect color wire to other cage clamp connector.
9. Select mounting location for remote control box near battery. Secure remote control box with 3M tape and/or tie wraps.
10. Remove fuse from remote control fuse holder.
11. Connect White wire from remote control to cage clamp with color wire.

Questions? Call us at: 1 (800) 382-1388 M-TH 8:30AM-5:30PM / FR 9:30AM-5:30PM EST

Installation Instructions - Page 2

11. Connect Green wire (if remote does not have Green wire then use Black wire) to cage clamp with Black Wire.
12. Connect Red wire from remote control to [+] side of battery using spade terminal.
13. Connect Black wire from remote control to [-] side of battery or ground using spade terminal.
14. Heat spade terminals with heat gun so that insulation shrinks around wire.
15. Secure any remaining wires with tie wraps.
16. Place fuse in fuse holder and replace cover.
17. Turn on switch and check operation of all lights. Allow double-sided tape to bond for 72 hours before exposing to water

This product is designed and intended for use as auxiliary lighting only. It is NOT intended to replace any original equipment lighting installed on the vehicle and should not be used for that purpose. This product must be wired so that it does not interfere with any original equipment lighting.

Cage Clamp® Instructions




Strip wire 9-10 mm. Use the stripped wire gauge on the back of the connector to verify correct strip length.



Push up lever and insert conductor



Push down lever to its closed position.

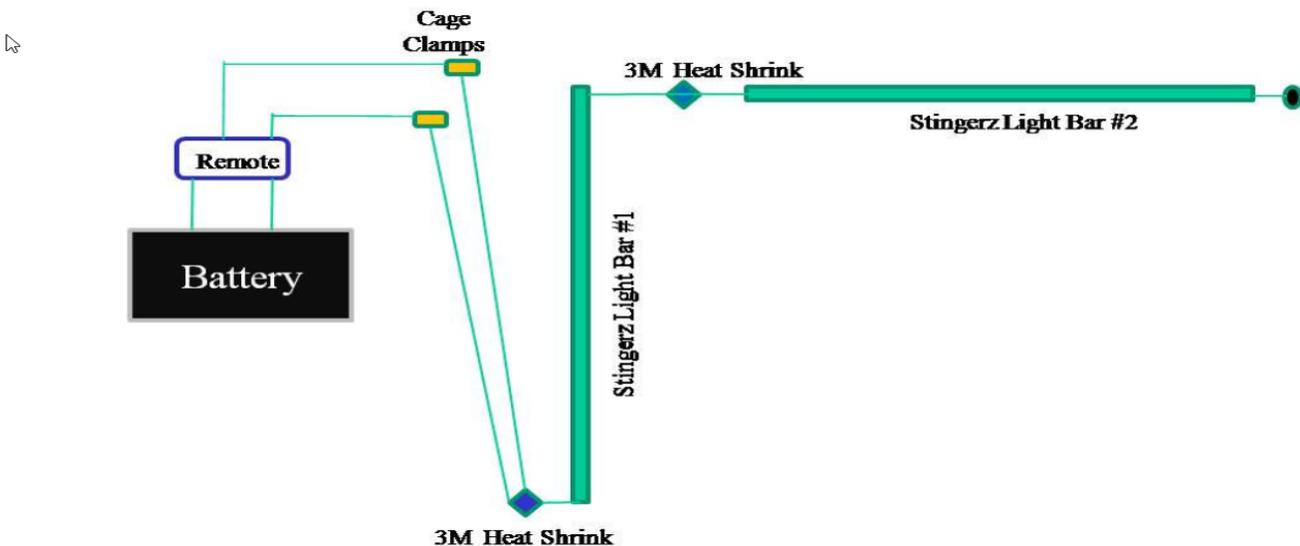

Questions? Call us at: 1 (800) 382-1388 M-TH 8:30AM-5:30PM / FR 9:30AM-5:30PM EST