




## Custom Dynamics® Hyper Bright LED Bulb Installation Instructions

We thank you for purchasing the Custom Dynamics® Hyper Bright LED Bulb! Our products utilize the latest technology and highest quality components to ensure you the most reliable service. We offer one of the best warranty programs in the industry and we back our products with excellent customer support, if you have questions before or during installation of this product please call Custom Dynamics® at 1(800) 382-1388.

**Part Numbers: 194-HA 194-HW**

**Package Contents:**

- 194 LED Bulb (1)

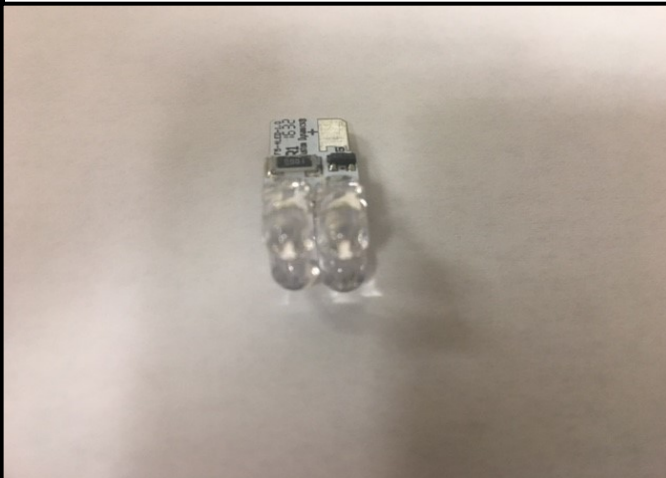

**Installation:**

1. Ensure vehicle ignition is off.
2. Remove lens cover, see service manual if needed.
3. Remove stock bulb from socket.
4. Make sure socket contacts are clean.
5. Push new LED assembly into socket using back and forth motion. Orientation does not matter, it will work either way.
6. Reinstall Lens.
7. Test Operation.

**Fits:** Replacement 194 Bulb



### ATTENTION



Please read all Information below before Installation

**Warning:** Be careful with certain vehicle charging systems, this LED unit is rated for a maximum of 13.8 VDC current. Higher current exposure will damage the unit which is not covered under warranty.

**Important:** Consult vehicle detailed service manual and test vehicle system before installing, make sure system is not dependent on load for proper operation.



*Note: This product is designed and intended only for use as auxiliary lighting on motorcycles only. This product is NOT intended to replace any original equipment lighting installed on the motorcycle and should not be used for that purpose. This product must be wired such that it does not interfere with any original equipment lighting.*

**Questions? Call us at: 1 (800) 382-1388 M-TH 8:30AM-5:30PM / FR 9:30AM-5:30PM EST**