



## Custom Dynamics® XG Replacement Flasher Relay Installation Instructions


We thank you for purchasing the Custom Dynamics® EDFR Flasher Relay. Our products utilize the latest technology and highest quality components to ensure you the most reliable service. We offer one of the best warranty programs in the industry and we back our products with excellent customer support, if you have questions before or during installation of this product please call Custom Dynamics® at 1(800) 382-1388.

**Part Numbers:** FL005

**Package Contents:**

- Flasher Relay (1)
- Instructions

**Fitment:** 2015-2019 Harley-Davidson® XG500, XG750



### ATTENTION




Please read all Information below before Installation

**Warning:** Disconnect negative battery cable from battery; refer to owner's manual. Failure to do so may result in electrical shock, injury, or fire. Secure negative battery cable away from positive side of battery and all other positive voltage sources on vehicle.

**Safety First:** Make sure the bike is parked on a level surface and bike's mechanical components are cool to the touch.

**Installation:**

1. Remove the seat and disconnect the negative battery cable from the battery.
2. Locate the existing turn signal flasher relay as shown in Picture 1.
3. Unplug the existing turn signal flasher relay and replace with the FL005 XG replacement turn signal flasher relay.
4. Secure the turn signal flasher relay in place.
5. Re-connect the negative battery cable to the battery.
6. Test operation of left and right turn signals.
7. Re-install the seat and test all lighting for proper operation before riding.

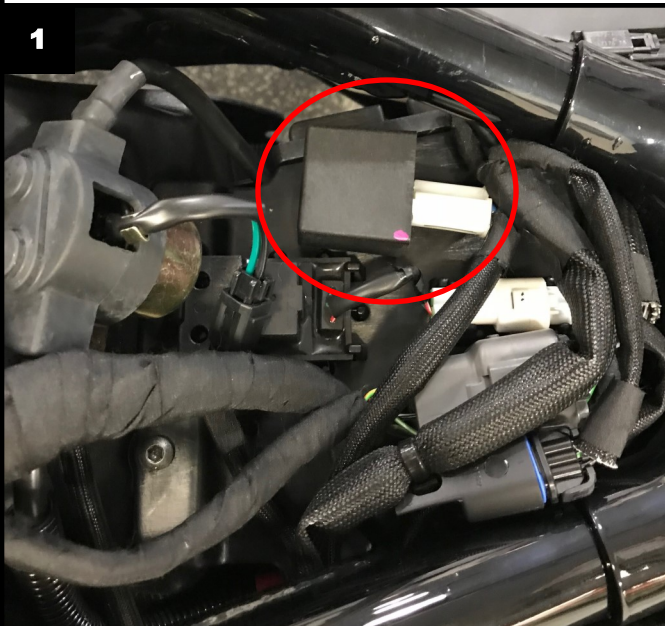

Questions? Call us at: 1 (800) 382-1388 M-TH 8:30AM-5:30PM / FR 9:30AM-5:30PM EST