



Custom Dynamics® Dual Color LED Tag Boltz Installation Instructions

We thank you for purchasing the Custom Dynamics® Dual Color LED Tag Boltz. Our products utilize the latest technology and high quality components to ensure you the most reliable service. We offer one of the best warranty programs in the industry and we back our products with excellent customer support, if you have questions before or during installation of this product please call Custom Dynamics® at 1(800) 382-1388.

Part Number(s): TB03B TB04B
TB03C TB04C

Package Contents:

- Dual Color Tag Boltz (Pair)
- Washers (2)
- Nuts (2)
- Instructions

Fits: Compatible with 12VDC systems with a negative ground.

Technical Information:

- Thread: M-12
- Thread diameter: .232"
- Threaded shaft length: .950"
- Head Diameter: .515"
- Head Height with LED: 1.10"
- Wire Type: 26 AWG
- Wire Length: 23"



Please read all Information below before Installation

Installation


1. Mount LED Tag Boltz to vehicle with supplied mounting hardware.
2. If wires need to be routed through any holes, cover wires with heat shrink tubing to provide a layer of protection.
3. Connect black wire to a good ground source.
4. Connect white wire to 12VDC fused running light source such as tail light or existing license plate illumination wiring.
5. Connect red wire to 12VDC fused running, brake, or turn light source depending on how you would like to use the rear facing LED.
6. Check operation in both modes.

Important: This product is designed and intended for use as auxiliary lighting only. It is NOT intended to replace any original equipment lighting installed on the vehicle and should not be used for that purpose. This product must be wired so that it does not interfere with any original equipment lighting.

Safety First: Always wear appropriate safety gear including safety glasses when performing any electrical work. It is highly recommended that safety glasses be worn throughout this installation process.

Important: Turn fuel supply valve to the off position before starting. Be sure bike is on level surface, secure and cool.

Important: Disconnect negative battery cable from battery; refer to owner's manual. Failure to do so may result in electrical shock, injury, or fire. Secure negative battery cable away from positive side of battery and all other positive voltage sources on bike.

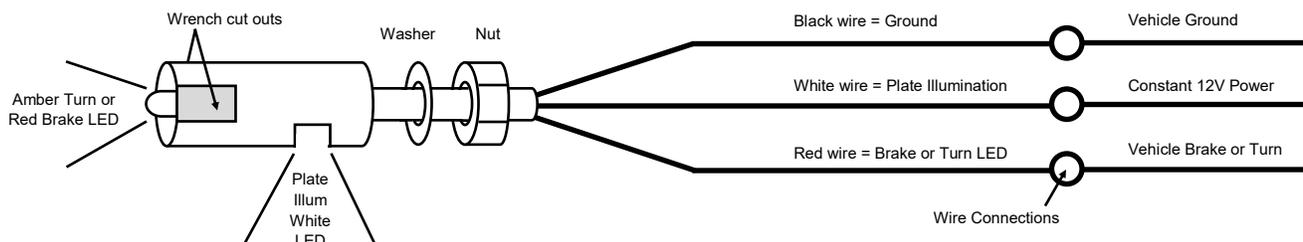

Questions? Call us at: 1 (800) 382-1388 M-TH 8:30AM-5:30PM / FR 9:30AM-5:30PM EST