



Custom Dynamics® LED Passing Lamps Installation Instructions

We thank you for purchasing the Custom Dynamics® LED Passing Lamps. Our products utilize the latest technology and high quality components to ensure you the most reliable service. We offer one of the best warranty programs in the industry and we back our products with excellent customer support, if you have questions before or during installation of this product please call Custom Dynamics® at 1(800) 382-1388.

Part Number: CD-45-Y

Package Contents:

- 4.5" LED Passing Lamps (2)
- Instructions

Fits: 2024 Harley-Davidson® Ultra Limited (FLHTK) and Tri Glide Ultra (FLHTCUTG), 2023-earlier Electra Glide Classic (FLHTC), Electra Glide Classic CVO™ (FLHTCSE), Electra Glide Police (FLHTP), Ultra Classic (FLHTCU), Ultra Classic CVO™ (FLHTCUSE), Ultra Classic Low (FLHTCUL), Ultra Limited (FLHTK), Ultra Limited Low (FLHTKL), CVO™ Limited (FLHTKSE), Road King (FLHR), Road King Classic (FLHRC) & Road King Police (FLHP). 2008-earlier Electra Glide Standard (FLHT), 2009-2023 Tri Glide Ultra (FLHTCUTG) and 2020-2022 TriGlide CVO™ (FLHTCUTGSE), 2017-earlier Softail Deluxe (FLSTN), Deluxe CVO™ (FLSTNSE), Heritage (FLST), Heritage Classic (FLSTC), Heritage Springer (FLSTS) and Springer Classic (FLSTSC).



Please read all Information below before Installation

Important: Units must be properly aimed such that the beam pattern cut off line complies with applicable regulations. It is recommended a professional service provider or qualified dealer perform the necessary adjustments for proper aiming.

Warning: To prevent possible electrical shock, disconnect the negative Battery terminal before installing this product.




Installation

1. Disconnect the vehicle battery negative [-] terminal.
2. Review detailed service manual for instructions on replacing factory passing lamp bulbs.
3. Remove the factory passing lamps from vehicle.
4. Connect the passing lamps to the existing factory Connectors. Note the polarity designations on the passing lamp connector and connect to the bike accordingly. Refer to Photo 1.

Note: 2004 and earlier models require adapter CDTB-PLA for plug and play capability. Adapter sold separately.

5. Reassemble passing lamp per the instructions in detailed factory service manual. Make sure no wires or any components of the harness or adapter can be crushed or pinched during installation.
6. Connect the vehicle battery negative [-] terminal.
7. Turn ignition power on to test both lamps for proper function. Aim or adjust if needed.

1

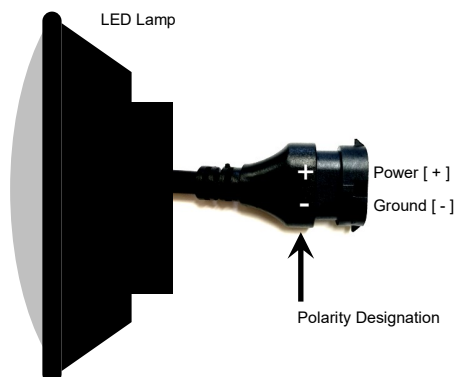

Questions? Email: info@CustomDynamics.com or Call us at: 1 (800) 382-1388 M-TH 8:30AM-5:30PM / FR 9:30AM-5:30PM EST